


520

Pitch 12,7 mm

H= 8,7 mm

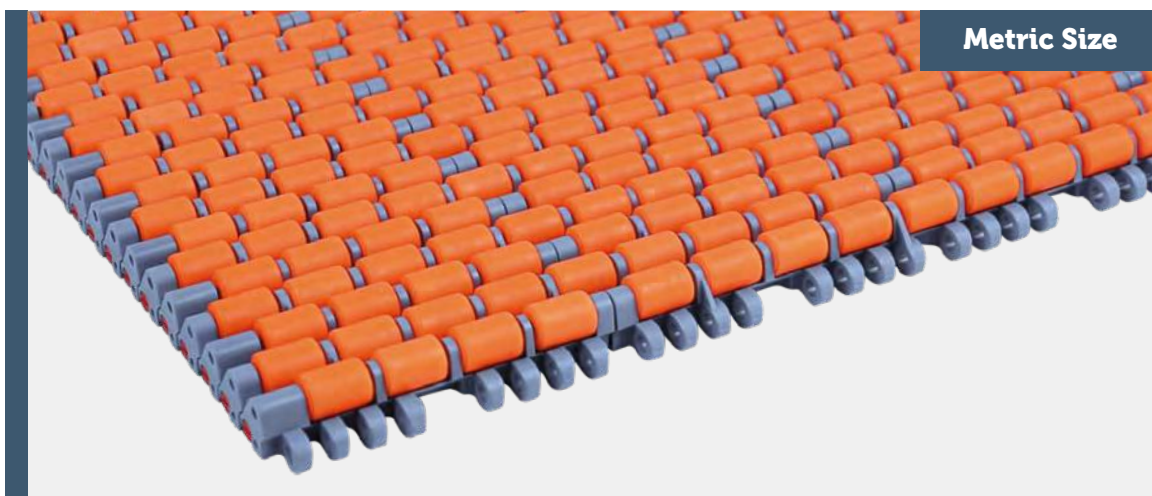


520 FT
520 HD FT
520 FTT
520 FG
520 GT
520 LBP




520 PRO LBP
520 M

Movex®

520 M

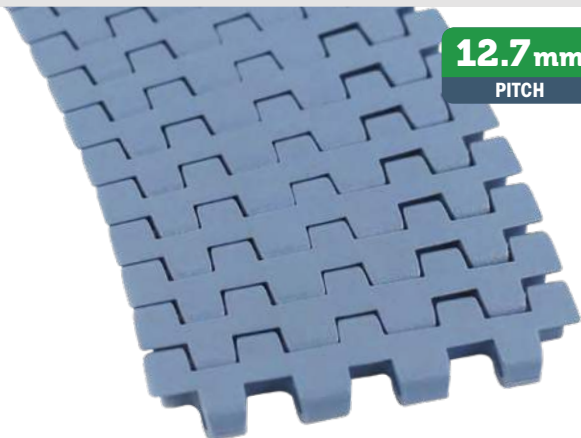Tappeto Modulare 520 M, H=8,7 K 330
 Modular Belt Series 520 M, H=8,7 K 330 / Modulare Mattenkette 520 M, H=8,7 K 330

Part	Article-Nr.	Ref.	A	Weight	*Material	Backflex radius min.: 15 mm
1193	1193019330	520 M K330	83,8	1,11	LFA	 <div style="background-color: green; color: white; padding: 5px; border-radius: 5px; display: inline-block;"> 12.7mm PITCH </div>
1193	1193039330	520 M K330	83,8	1,11	MX	

 10 feet 3.048 m			
240 links	pg. 269-270	pg. 155->161	pg. 516->524

Magnetic System

***Material**


LFA - Code 01
 Low friction Acetal
Easy Delivery

Max w. load: 2500 N/m
Weight: 7,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: Ferritic
 Stainless Steel

MX - Code 03
 Performance PBT

Max w. load: 2000 N/m
Weight: 7,2 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: Ferritic
 Stainless Steel

Version A - Standard

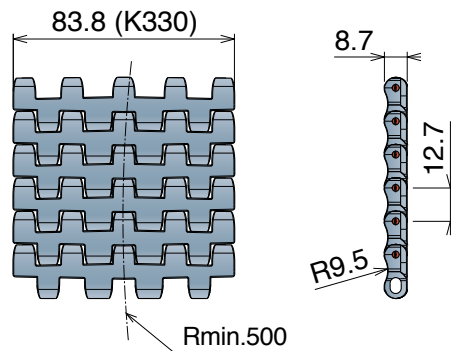


Advantages:

- No side transfer
- Space saving


Cost savings:

- Less belt required
- Less conveyor length required
- Less guides required
- Less drives required

Coventional layout

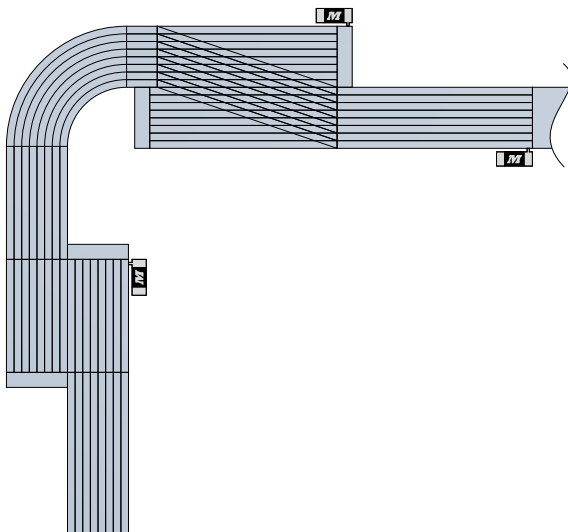

Layout with 520 M K330

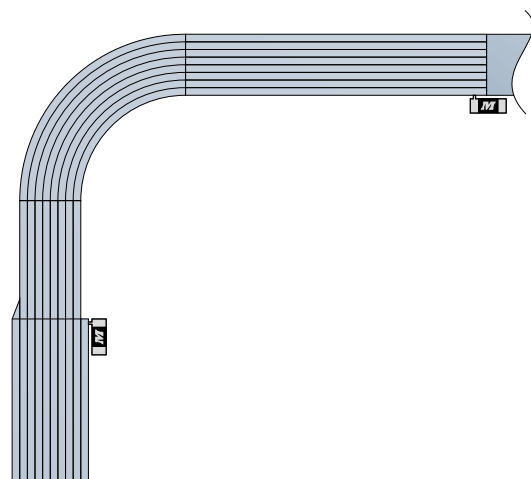

Transfer plate system recommended

