


# 525

Pitch 15,0 mm  
H= 8,7 mm

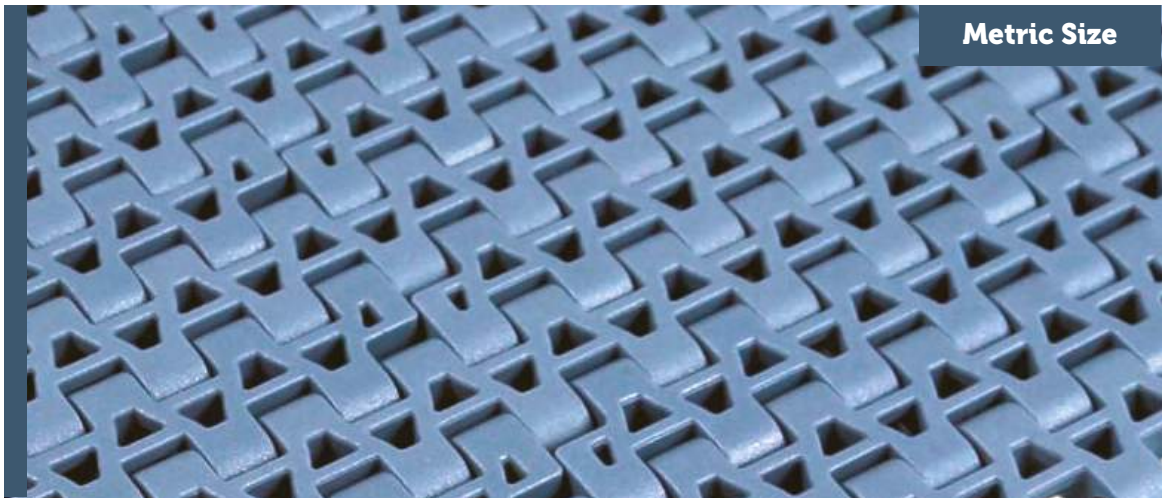

- 525 HD FT
- 525 HD FT+RIB
- 525 FTT
- 525 HD FG
- 525 HD GT
- 525 HD GT *Side Indent*

## 525 FTT



Tappeto Modulare 525 FTT, H=8,7 M=85  
 Modular Belt Series 525 FTT, H=8,7 M=85 / Modulare Mattenkette 525 FTT, H=8,7 M=85

CODE STRUCTURE GUIDE			
(Example)			
5256	03	0085	C
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**15.0mm**  
PITCH

Metric Size

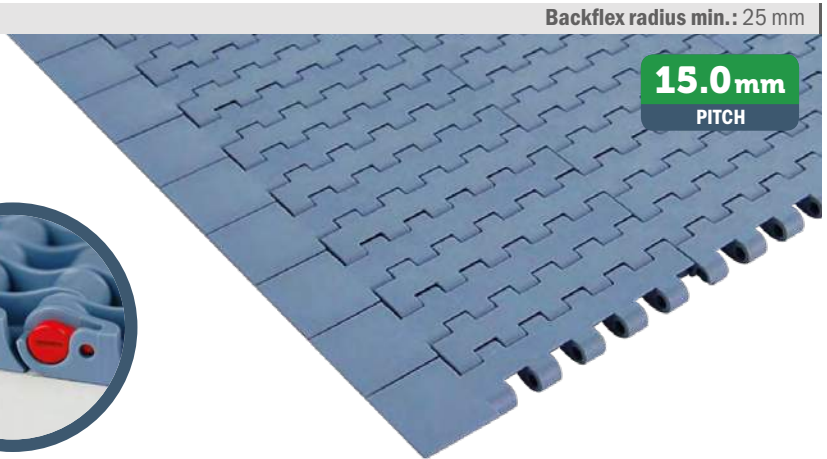

### \*Material

#### LFA - Code 01

Low friction Acetal


Max w. load: 21500 N/m  
 Weight: 7,8 kg/m<sup>2</sup>  
 Temp. range dry: -40÷80 °C  
 Temp. range wet: -40÷65 °C  
 Pin material: PBT white

#### MX - Code 03

Performance PBT

Max w. load: 17500 N/m  
 Weight: 7,5 kg/m<sup>2</sup>  
 Temp. range dry: -40÷120 °C  
 Temp. range wet: -40÷60 °C  
 Pin material: POM grey

### Version C

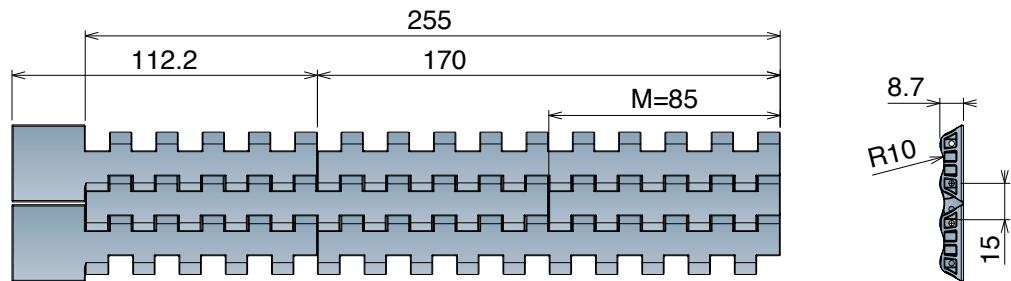

### Version CN - Near



### Version C0 - Opposite



### Version C

Series	Material	Width	Version
5256	*	0085	C

### Version CN - Near

Series	Material	Width	Version
5256	*	0170	CN
5256	*	0255	CN

### Version C0 - Opposite

Series	Material	Width	Version
5256	*	0170	C0
5256	*	0255	C0

On request available with bigger/different width