


525

Pitch 15,0 mm
H= 8,7 mm

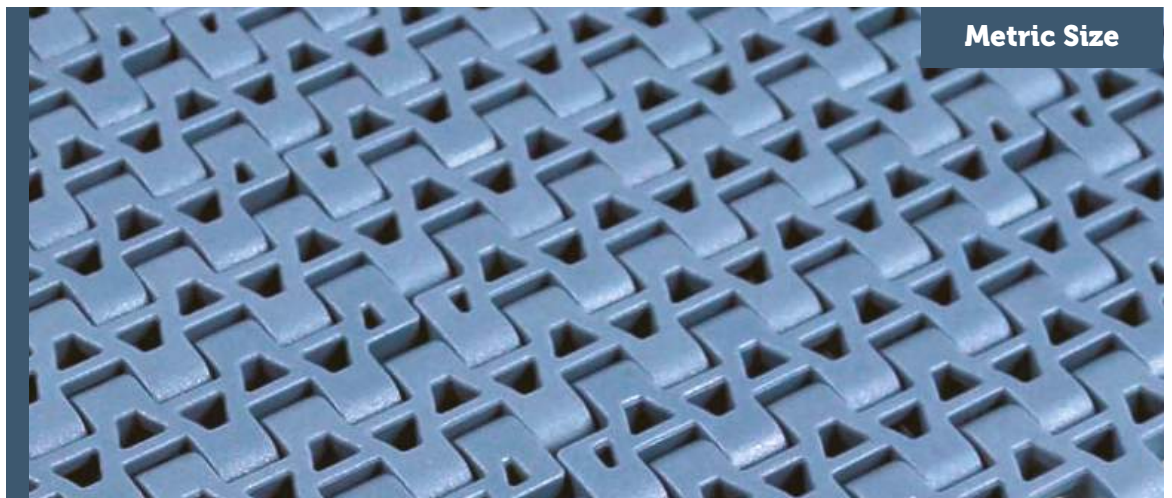

- 525 HD FT
- 525 HD FT+RIB
- 525 FTT
- 525 HD FG
- 525 HD GT
- 525 HD GT *Side Indent*

525 HD FT

Tappeto Modulare 525 HD, H=8,7 M=85
 Modular Belt Series 525 HD, H=8,7 M=85 / Modulare Mattenkette 525 HD, H=8,7 M=85

CODE STRUCTURE GUIDE			
(Example)			
5261	03	0340	C
Series	*Material	Width	Version


Backflex radius min.: 25 mm

15.0mm
PITCH

Metric Size

- pg. 271
- pg. 516->524
- pg. 488

Reinforced positioner

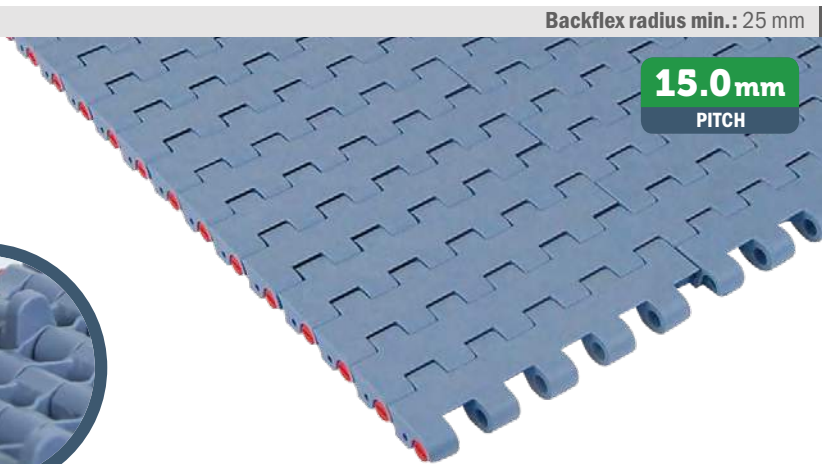

***Material**

LFA - Code 01
Low friction Acetal

Easy Delivery

- Max w. load: 25500 N/m
- Weight: 9,0 kg/m²
- Temp. range dry: -40÷80 °C
- Temp. range wet: -40÷65 °C
- Pin material: PBT white

MX - Code 03
Performance PBT


- Max w. load: 20500 N/m
- Weight: 8,7 kg/m²
- Temp. range dry: -40÷120 °C
- Temp. range wet: -40÷60 °C
- Pin material: POM grey

PFX - Code 30
Extra performance PBT


- Max w. load: 20500 N/m
- Weight: 8,7 kg/m²
- Temp. range dry: -40÷120 °C
- Temp. range wet: -40÷60 °C
- Pin material: POM grey

THE BEST CHOICE FOR DRY RUNNING APPLICATIONS


Version A - Standard

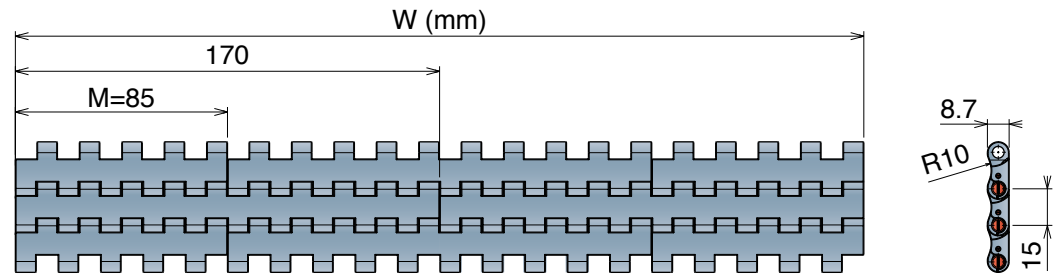

Version B - With 1 Positioner

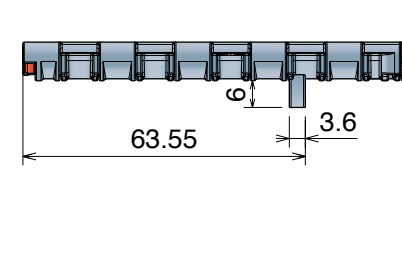

Version C - With 2 Positioner

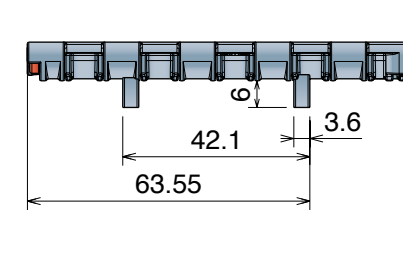

Version A - Standard

Series	Material	Width	Version
5261	*	0085	A
5261	*	0170	A
5261	*	0255	A
5261	*	0340	A
5261	*	0425	A
5261	*	0510	A
5261	*	0595	A
5261	*	0680	A
5261	*	0765	A
5261	*	0850	A
5261	*	0935	A
5261	*	1020	A
5261	*	1105	A
5261	*	1190	A
5261	*	1275	A
5261	*	1360	A
5261	*	1445	A
5261	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5261	*	0085	B
5261	*	0170	B
5261	*	0255	B
5261	*	0340	B
5261	*	0425	B
5261	*	0510	B
5261	*	0595	B
5261	*	0680	B
5261	*	0765	B
5261	*	0850	B
5261	*	0935	B
5261	*	1020	B
5261	*	1105	B
5261	*	1190	B
5261	*	1275	B
5261	*	1360	B
5261	*	1445	B
5261	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5261	*	0085	C
5261	*	0170	C
5261	*	0255	C
5261	*	0340	C
5261	*	0425	C
5261	*	0510	C
5261	*	0595	C
5261	*	0680	C
5261	*	0765	C
5261	*	0850	C
5261	*	0935	C
5261	*	1020	C
5261	*	1105	C
5261	*	1190	C
5261	*	1275	C
5261	*	1360	C
5261	*	1445	C
5261	*	1530	C