


# 530 Series

# 530

Pitch 15,0 mm

H= 8,7 mm

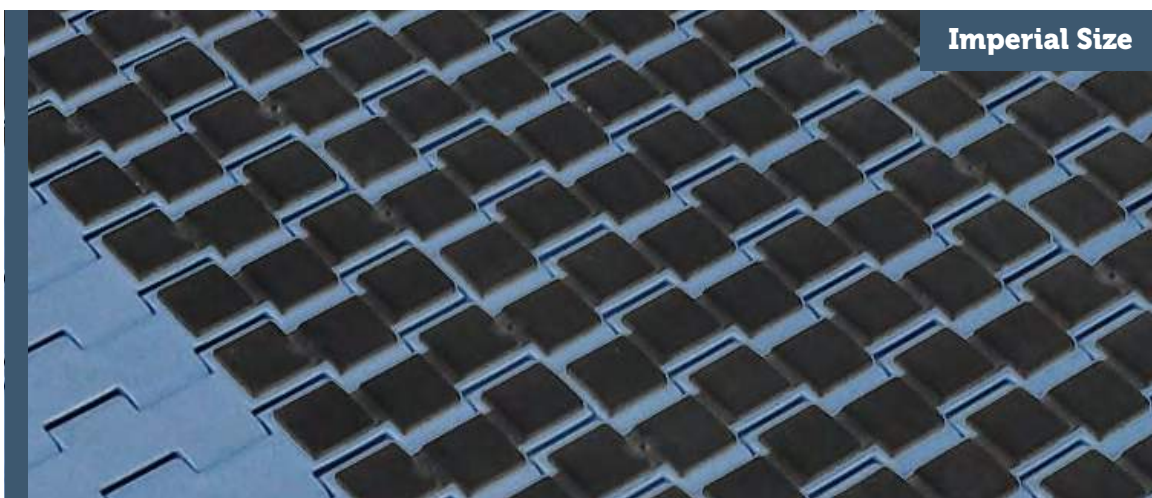

530 FT

530 FTT

530 GT

530 GT *Side indent*

530 LBP

# Movex®



## 530 FT

Tappeto Modulare 530 FT, H=8,7 M=3"  
 Modular Belt Series 530 FT, H=8,7 M=3" / Modulare Mattenkette 530 FT, H=8,7 M=3"

CODE STRUCTURE GUIDE			
(Example)			
<b>5321</b>	<b>01</b>	<b>0030</b>	<b>A</b>
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**15.0mm**  
PITCH

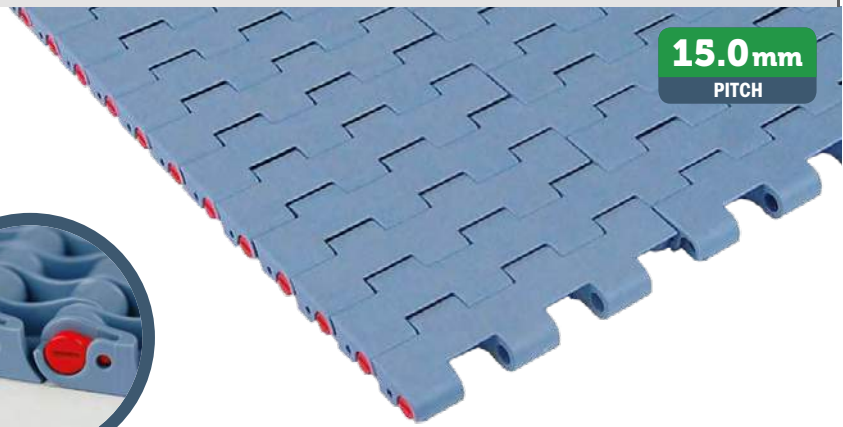

### \*Material

**LFA - Code 01**  
Low friction Acetal

Easy Delivery

Max w. load: 26000 N/m  
 Weight: 9,2 kg/m<sup>2</sup>  
 Temp. range dry: -40÷80 °C  
 Temp. range wet: -40÷65 °C  
 Pin material: PBT white

**MX - Code 03**  
Performance PBT

Max w. load: 21000 N/m  
 Weight: 9,0 kg/m<sup>2</sup>  
 Temp. range dry: -40÷120 °C  
 Temp. range wet: -40÷60 °C  
 Pin material: POM grey

**DKM - Code 16**  
Aramide Reinforced Acetal

Max w. load: 26000 N/m  
 Weight: 9,2 kg/m<sup>2</sup>  
 Temp. range dry: -40÷80 °C  
 Temp. range wet: -40÷65 °C  
 Pin material: PBT white


**MWX - Code 17**  
Polyamide Composite

Max w. load: 26000 N/m  
 Weight: 9,5 kg/m<sup>2</sup>  
 Temp. range dry: -40÷104 °C  
 Temp. range wet: NR  
 Pin material: PBT white

**MPX - Code 25**  
Lubricated Acetal

Max w. load: 26000 N/m  
 Weight: 9,2 kg/m<sup>2</sup>  
 Temp. range dry: -40÷80 °C  
 Temp. range wet: -40÷65 °C  
 Pin material: PBT white

### Version A - Standard

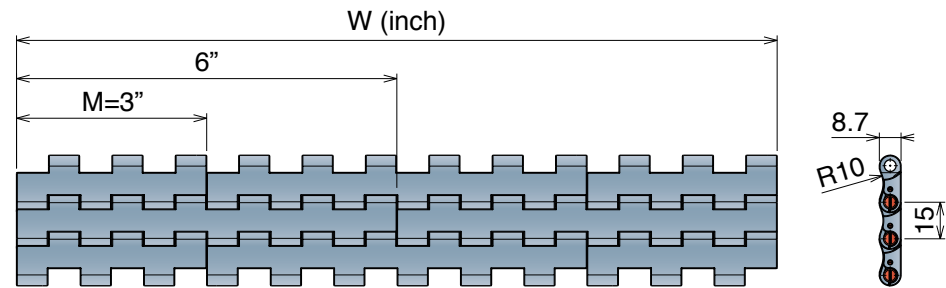

### Version A - Standard

Series	Material	Width	Version
5321	*	0003	A
5321	*	0006	A
5321	*	0009	A
5321	*	0012	A
5321	*	0015	A
5321	*	0018	A
5321	*	0021	A
5321	*	0024	A
5321	*	0027	A
5321	*	0030	A
5321	*	0033	A
5321	*	0036	A
5321	*	0039	A
5321	*	0042	A
5321	*	0045	A
5321	*	0048	A
5321	*	0051	A
5321	*	0054	A