


# 530 Series

# 530

Pitch 15,0 mm

H= 8,7 mm

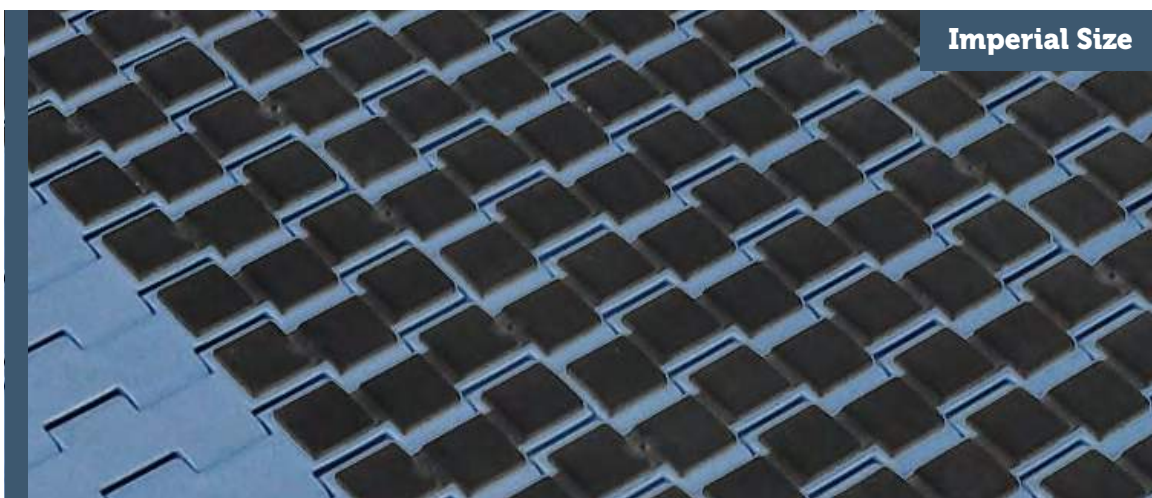

530 FT

530 FTT

530 GT

530 GT *Side indent*

530 LBP

# Movex®


## 530 FTT

Tappeto Modulare 530 FTT, H=8,7 M=3"  
 Modular Belt Series 530 FTT, H=8,7 M=3" / Modulare Mattenkette 530 FTT, H=8,7 M=3"

CODE STRUCTURE GUIDE			
(Example)			
<b>5326</b>	<b>01</b>	<b>0006</b>	<b>A</b>
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**15.0mm**  
PITCH



pg. 271

pg. 516->524

pg. 489



Imperial Size

### \*Material

#### LFA - Code 01

Low friction Acetal


Max w. load: 26000 N/m  
 Weight: 9,2 kg/m<sup>2</sup>  
 Temp. range dry: -40÷80 °C  
 Temp. range wet: -40÷65 °C  
 Pin material: PBT white

#### MX - Code 03

Performance PBT

Max w. load: 21000 N/m  
 Weight: 9,0 kg/m<sup>2</sup>  
 Temp. range dry: -40÷120 °C  
 Temp. range wet: -40÷60 °C  
 Pin material: POM grey

### Version A - Standard

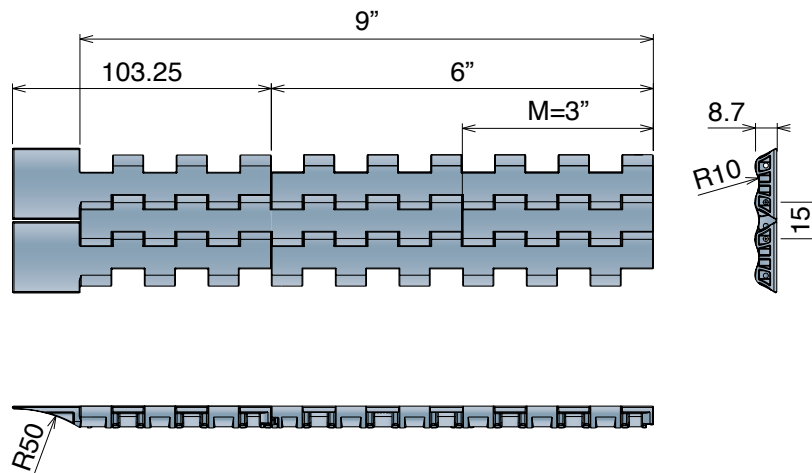

### Version A - Standard

Series	Material	Width	Version
5326	*	0003	A
5326	*	0006	A
5326	*	0009	A

On request available with bigger/different width