

**590 Series**

# 590

Pitch 19,05 mm  
H= 8,7 mm



590 FT  
590 FT *One track Belt*  
590 FTT

**Movex<sup>®</sup>**

# 590 FT One track Belt

Tappeti modulari / Modular belts / Mattenketten

Imperial Size


## 590 FT One track Belt




Tappeto Modulare 590 FT, H=8,7  
Modular Belt Series 590 FT, H=8,7 / Modulare Mattenkette 590 FT, H=8,7

CODE STRUCTURE GUIDE			
(Example)			
<b>5301</b>	<b>03</b>	<b>9325</b>	<b>C</b>
Series	*Material	Width	Version

Backflex radius min.: 25 mm

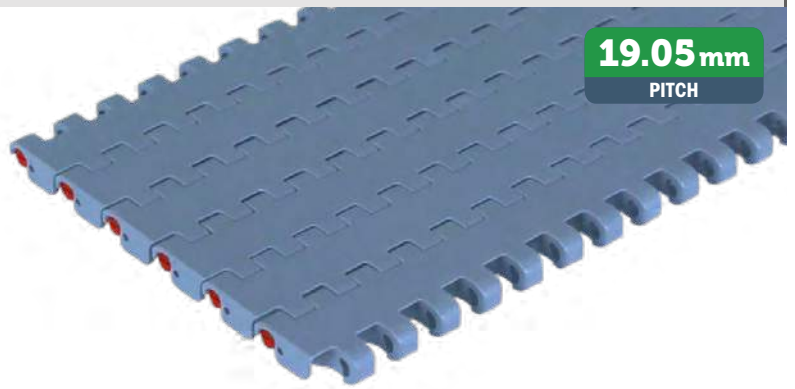**19.05 mm**  
PITCH



		
pg. 272	pg. 516->524	pg. 486

**\*Material**

**LFA - Code 01**  
*Low friction Acetal*

**Easy Delivery**

**Max w. load:** 30000 N/m  
**Weight:** 7,2 kg/m<sup>2</sup>  
**Temp. range dry:** -40+80 °C  
**Temp. range wet:** -40+65 °C  
**Pin material:** PBT white


**MX - Code 03**  
*Performance PBT*

**Max w. load:** 24000 N/m  
**Weight:** 7,0 kg/m<sup>2</sup>  
**Temp. range dry:** -40+120 °C  
**Temp. range wet:** -40+60 °C  
**Pin material:** POM grey




**MPX - Code 25**  
*Lubricated Acetal*

**Max w. load:** 30000 N/m  
**Weight:** 7,2 kg/m<sup>2</sup>  
**Temp. range dry:** -40+80 °C  
**Temp. range wet:** -40+65 °C  
**Pin material:** PBT white

Version A - Standard



Version C - With 2 Positioner

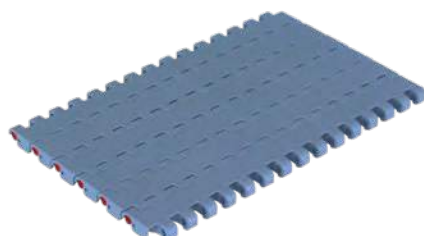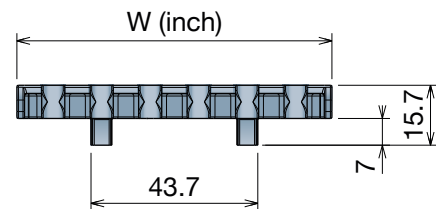

### K325 - One track belt

Series	Material	Width	Version
5301	*	9325	A
5301	*	9325	C

### K450 - One track belt

Series	Material	Width	Version
5301	*	9450	A
5301	*	9450	C

### K750 - One track belt

Series	Material	Width	Version
5301	*	9750	A
5301	*	9750	C

Tappeti modulari / Modular belts / Mattenketten