

590

Pitch 19,05 mm
H= 8,7 mm



Imperial Size

590 FT
590 FT *One track Belt*
590 FTT




590 FTT


Tappeto Modulare 590 FTT, H=8,7
 Modular Belt Series 590 FTT, H=8,7 / Modulare Mattenkette 590 FTT, H=8,7

CODE STRUCTURE GUIDE			
(Example)			
5306	01	9450	C-R
Series	*Material	Width	Version

Backflex radius min.: 25 mm

19.05mm
PITCH

		
pg. 272	pg. 516->524	pg. 487



Imperial Size

*Material

LFA - Code 01

Low friction Acetal

Max w. load: 30000 N/m
Weight: 7,2 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

MX - Code 03

Performance PBT


Max w. load: 24000 N/m
Weight: 7,0 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

MPX - Code 25


Lubricated Acetal

Max w. load: 30000 N/m
Weight: 7,2 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

Version 590 FTT DX

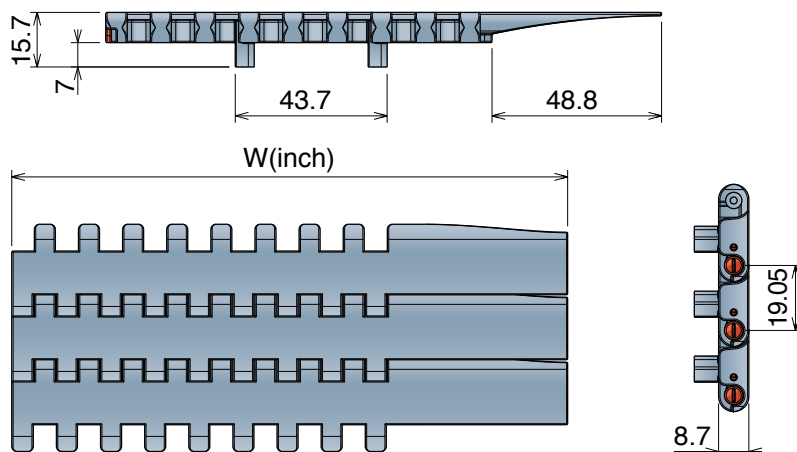

Version 590 FTT SX

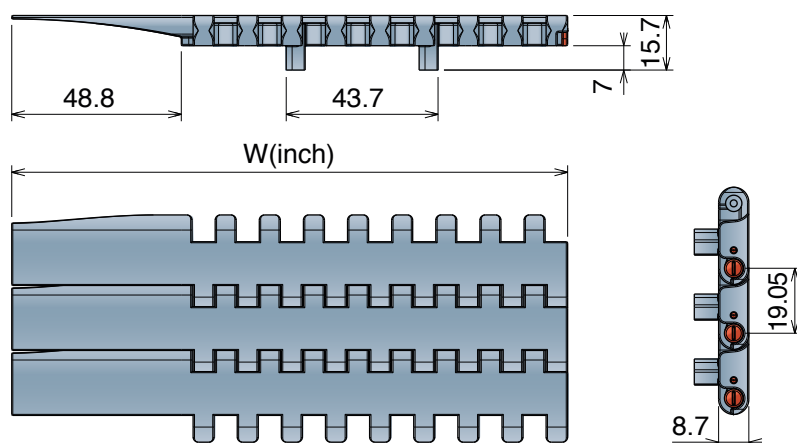

Version 590 FTT DX

Series	Material	Width	Version	Total width
5306	*	9450	C-R	160.0
5306	*	9750	C-R	236.2

Version 590 FTT SX

Series	Material	Width	Version	Total width
5306	*	9450	C-L	160.0
5306	*	9750	C-L	236.2