

# 550

Pitch 25,4 mm  
H= 8,7 mm



550 FT  
550 FT *One track Belt*  
550 FTT  
550 FG  
550 FG *One track Belt*  
550 GT

550 GT *Side indent*  
550 PRO FT  
550 PRO M

## 550 FT One track Belt

Tappeto Modulare 550 FT, H=8,7 K330  
Modular Belt Series 550 FT, H=8,7 K330 / Modulare Mattenkette 550 FT, H=8,7 K330

### CODE STRUCTURE GUIDE

(Example)

<b>5221</b>	<b>03</b>	<b>9330</b>	<b>A</b>
<b>Series</b>	<b>*Material</b>	<b>Width</b>	<b>Version</b>

Backflex radius min.: 25 mm

**25.4mm**  
PITCH


Metric Size



pg. 273-274



pg. 516->524

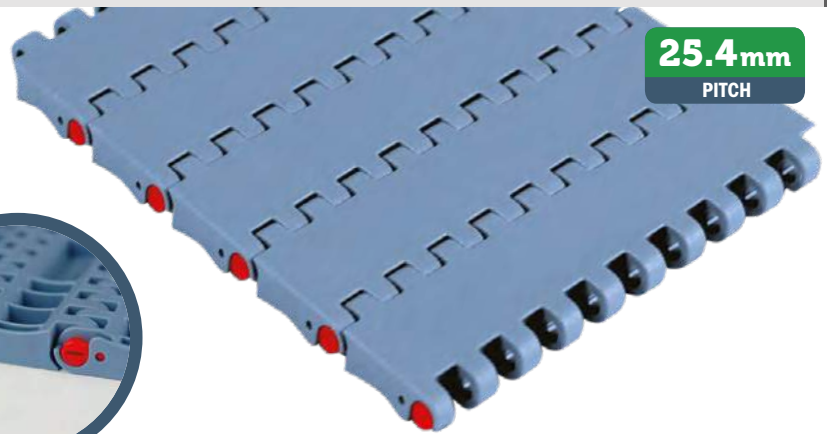

\*Material

### LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 27500 N/m  
Weight: 8,5 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white

### PP - Code 02

Polypropylene

Max w. load: 16500 N/m  
Weight: 8,4 kg/m<sup>2</sup>  
Temp. range dry: 4÷80 °C  
Temp. range wet: 4÷65 °C  
Pin material: PP blu

### MX - Code 03

Performance PBT

Max w. load: 22000 N/m  
Weight: 8,2 kg/m<sup>2</sup>  
Temp. range dry: -40÷120 °C  
Temp. range wet: -40÷60 °C  
Pin material: POM grey

### DKM - Code 16

Aramide Reinforced Acetal

Max w. load: 27500 N/m  
Weight: 8,5 kg/m<sup>2</sup>  
Temp. range dry: -40÷80 °C  
Temp. range wet: -40÷65 °C  
Pin material: PBT white

### MWX - Code 17

Polyamide Composite

Max w. load: 27500 N/m  
Weight: 8,9 kg/m<sup>2</sup>  
Temp. range dry: -40÷104 °C  
Temp. range wet: NR  
Pin material: PBT white


### PFX - Code 30

Extra performance PBT


Max w. load: 22000 N/m  
Weight: 8,2 kg/m<sup>2</sup>  
Temp. range dry: -40÷120 °C  
Temp. range wet: -40÷60 °C  
Pin material: POM grey

THE BEST CHOICE FOR  
DRY RUNNING APPLICATIONS

### Version A - Standard

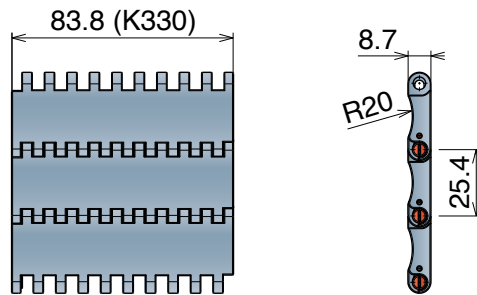

### Version C - With 2 Positioner

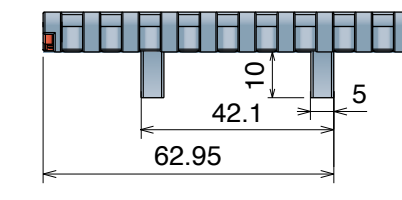

### Version A - Standard

Series	Material	Width	Version
5221	*	9330	A

### Version C - With 2 Positioners

Series	Material	Width	Version
5221	*	9330	C