

551

Pitch 25,4 mm
H= 12,7 mm



551 FT
551 FTT
551 GT
551 GT *Side indent*
551 LBP
551 PRO LBP



551 FTT

Tappeto Modulare 551 FTT, H=12,7 M=85
 Modular Belt Series 551 FTT, H=12,7 M=85 / Modulare Mattenkette 551 FTT, H=12,7 M=85

CODE STRUCTURE GUIDE			
(Example)			
5236	01	0085	C
Series	*Material	Width	Version

Backflex radius min.: 25 mm

25.4mm
PITCH

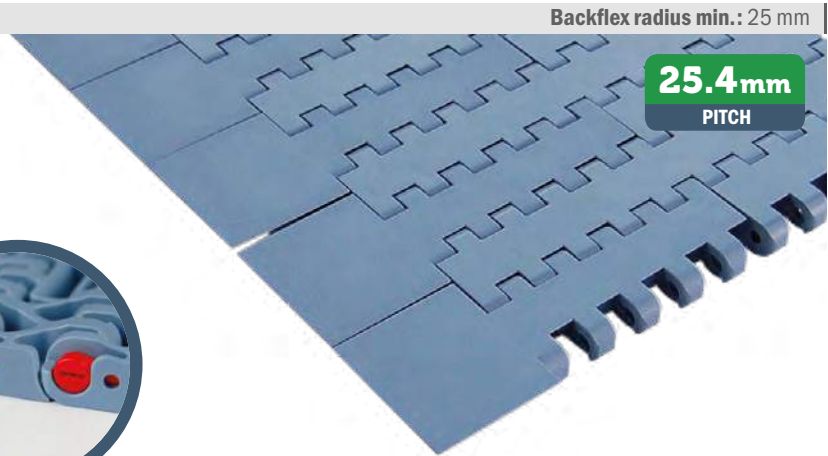

Metric Size

*Material

LFA - Code 01

Low friction Acetal

Max w. load: 41500 N/m
 Weight: 12,5 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

MX - Code 03

Performance PBT


Max w. load: 33500 N/m
 Weight: 12,0 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey

MPX - Code 25


Lubricated Acetal

Max w. load: 41500 N/m
 Weight: 12,5 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white


Version C

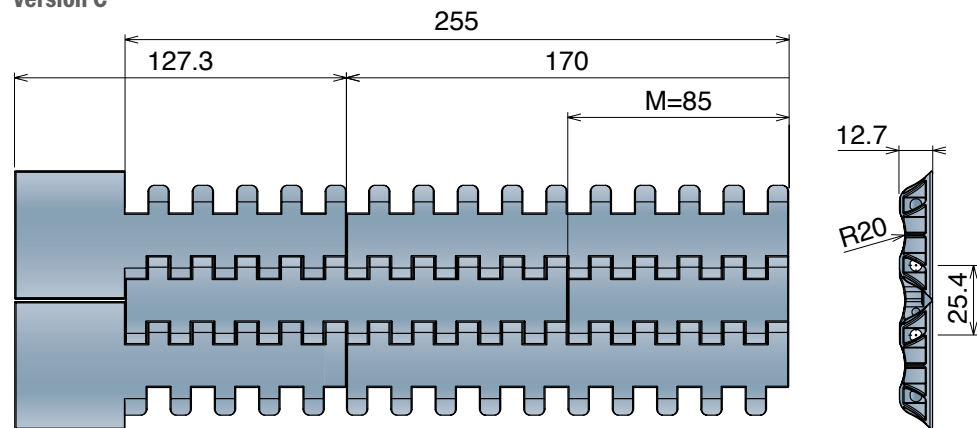

Version CN - Near

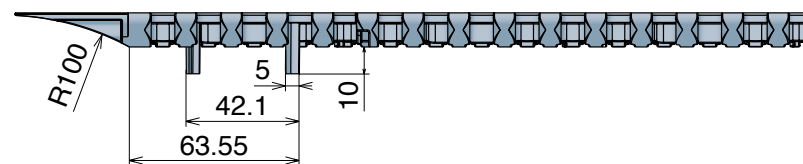

Version C0 - Opposite

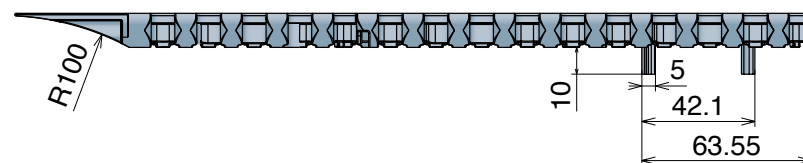

Version C

Series	Material	Width	Version
5236	*	0085	C

Version CN - Near

Series	Material	Width	Version
5236	*	0170	CN
5236	*	0255	CN

Version C0 - Opposite

Series	Material	Width	Version
5236	*	0170	C0
5236	*	0255	C0

On request available with bigger/different width