


556 Series

556

Pitch 25,4 mm

H= 12,7 mm

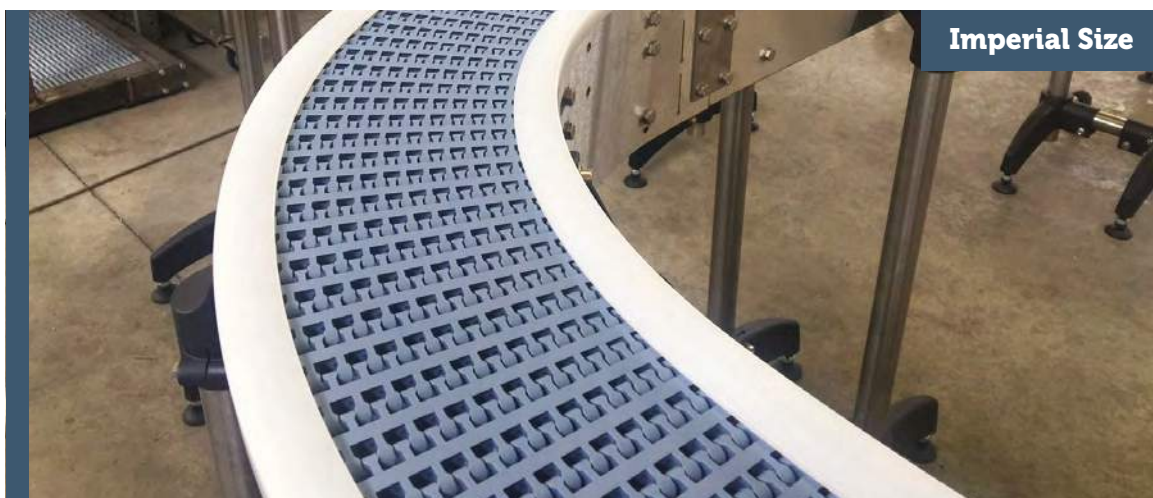

556 FT

556 GT

Movex[®]

556 GT



Tappeto Modulare Curvilineo Serie 556 GT, H=12,7 M=3"

Side Flex Modular Belt Series 556 GT, H=12,7 M=3" / Kurvengängige Mattenkette Serie 556 GT, H=12,7 M=3"

CODE STRUCTURE GUIDE			
(Example)			
5433	01	0018	B-S
Series	*Material	Width	Version

Backflex radius min.: 25 mm

25.4mm
PITCH

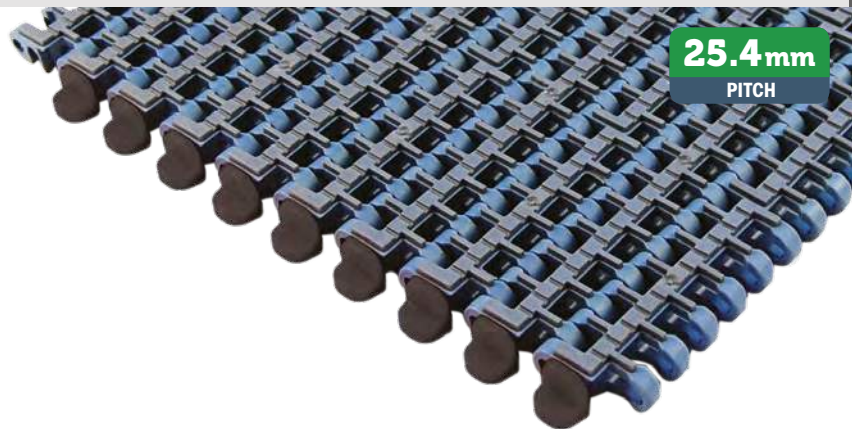

pg. 280

pg. 516->524

pg. 494

Imperial Size

*Material

LFA - Code 01

Low friction Acetal

Max w. load:

Straight: 30000 N/m
Curve: 2000 N

Weight: 7,7 kg/m²

Temp. range dry: -40÷80 °C

Temp. range wet: -40÷65 °C

Pin material: PBT white

Hardness of

Grip top Rubber: 50 ShA

LFB - Code 23

Low friction Acetal

Max w. load:

Straight: 30000 N/m
Curve: 2000 N

Weight: 7,7 kg/m²

Temp. range dry: -40÷80 °C

Temp. range wet: -40÷65 °C

Pin material: PBT white

Hardness of

Grip top Rubber: 50 ShA

PPB - Code 24

Polypropylene

Standard rubber: 50 ShA

Code: -S

Max w. load:

Straight: 19500 N/m
Curve: 1300 N

Weight: 5,8 kg/m²

Temp. range dry: 4÷65 °C


Temp. range wet: 4÷65 °C

Pin material: PP blu


Hardness of

Grip top Rubber: 50 ShA

**THE BEST CHOICE FOR
FOOD CONTACT APPLICATION**

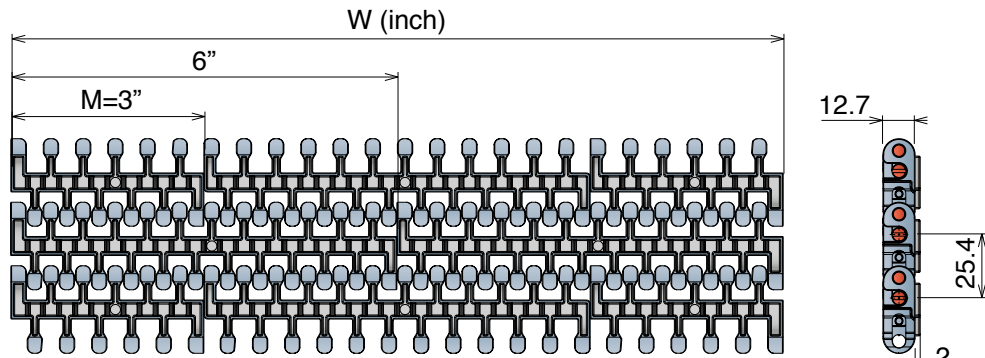

STANDARD




Series	Material	Width	Version	min radius
5433	*	0009	A	435
5433	*	0012	A	580
5433	*	0015	A	725
5433	*	0018	A	890
5433	*	0021	A	1040
5433	*	0024	A	1250

ONE TRACK BELT

Series	Material	Width	Version	min radius
5433	*	0003	A	145
5433	*	0006	A	290

TAB




Series	Material	Width	Version	min radius
5433	*	0009	B	435
5433	*	0012	B	580
5433	*	0015	B	725
5433	*	0018	B	890
5433	*	0021	B	1040
5433	*	0024	B	1250

ONE TRACK BELT

Series	Material	Width	Version	min radius
5433	*	0003	B	145
5433	*	0006	B	290

TAB/POSITIONER



Series	Material	Width	Version	min radius
5433	*	0009	C	435
5433	*	0012	C	580
5433	*	0015	C	725
5433	*	0018	C	890
5433	*	0021	C	1040
5433	*	0024	C	1250

ONE TRACK BELT

Series	Material	Width	Version	min radius
5433	*	0003	C	145
5433	*	0006	C	290