

600

Pitch 31,75 mm
H= 12,7 mm



- 600 *Standard*
- 600 *Heavy duty*
- 600 *Heavy duty with Bearings*
- 600 *Small radius*
- 600 *Heavy duty/Small radius*

- 600 *Heavy duty/Small radius with Bearings*
- 600 *with pusher*
- 1047 *Heavy duty guide*


600 Heavy duty with Bearings

Tappeto Modulare Curvilineo Serie 600, H=12,7 M=85
Side Flex Modular Belt Series 600, H=12,7 M=85 / Kurvengängige Mattenkette Serie 600, H=12,7 M=85

CODE STRUCTURE GUIDE			
(Example)			
5422	01	0340	F
Series	*Material	Width	Version

Backflex radius min.: 25 mm

31.75 mm
PITCH



Improved Design and Performance



Metric Size

*Material

LFA - Code 01

Low friction Acetal


Max w. load:
Straight 30000 N/m
Curve 3500 N
Weight: 9,0 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

LFB - Code 23


Low friction Acetal

Max w. load:
Straight 30000 N/m
Curve 3500 N
Weight: 9,0 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

Internal Min Radius
2 times the width

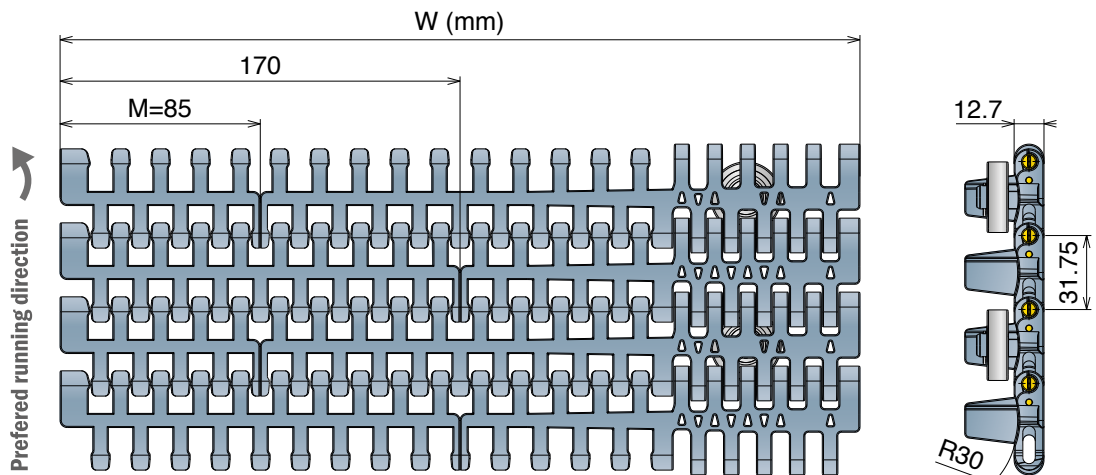

STANDARD



Series	Material	Width	Version	min radius
5422	*	0340	F	680
5422	*	0425	F	850
5422	*	0510	F	1020
5422	*	0595	F	1190
5422	*	0680	F	1360
5422	*	0765	F	1530
5422	*	0850	F	1700

Bearing Zoom

