

# 600

Pitch 31,75 mm  
H= 12,7 mm



- 600 *Standard*
- 600 *Heavy duty*
- 600 *Heavy duty with Bearings*
- 600 *Small radius*
- 600 *Heavy duty/Small radius*

- 600 *Heavy duty/Small radius with Bearings*
- 600 *with pusher*
- 1047 *Heavy duty guide*

## 600 Standard

Tappeto Modulare Curvilineo Serie 600, H=12,7 M=85  
Side Flex Modular Belt Series 600, H=12,7 M=85 / Kurvengängige Mattenkette Serie 600, H=12,7 M=85




### CODE STRUCTURE GUIDE

(Example)


<b>5421</b>	<b>01</b>	<b>0595</b>	<b>A</b>
<b>Series</b>	<b>*Material</b>	<b>Width</b>	<b>Version</b>

Backflex radius min.: 25 mm

**31.75mm**  
PITCH

		
pg. 283	pg. 516->524	pg. 495

**Improved Design and Performance**

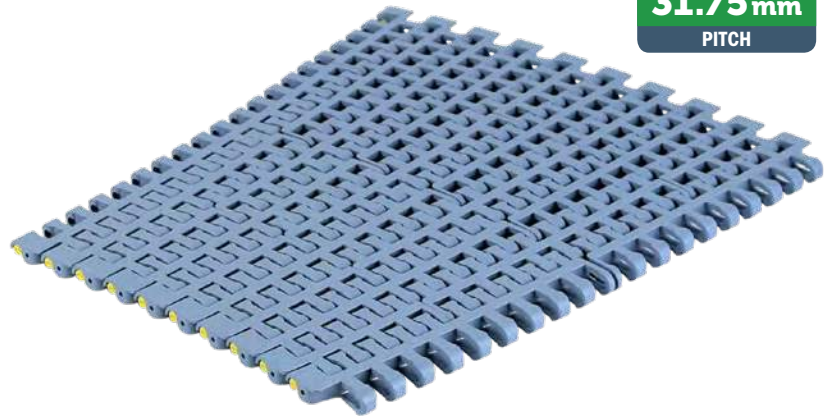

Metric Size

\*Material

### LFA - Code 01

Low friction Acetal


**Max w. load:**  
Straight 30000 N/m  
Curve 2500 N  
**Weight:** 7.7 kg/m<sup>2</sup>  
**Temp. range dry:** -40÷80 °C  
**Temp. range wet:** -40÷65 °C  
**Pin material:** PBT white

### LFB - Code 23

Low friction Acetal

**Max w. load:**  
Straight 30000 N/m  
Curve 2500 N  
**Weight:** 7.7 kg/m<sup>2</sup>  
**Temp. range dry:** -40÷80 °C  
**Temp. range wet:** -40÷65 °C  
**Pin material:** PBT white


**Internal Min Radius**  
**2 times the width**

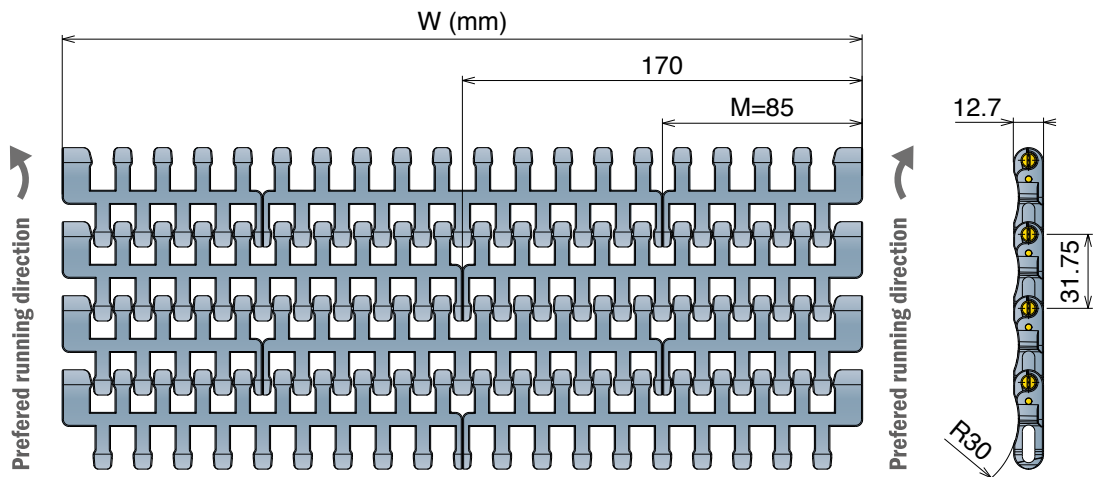


#### STANDARD




#### TAB



#### REVERSE TAB



#### TAB REVERSE TAB



Series	Material	Width	Version	min radius
5421	*	0255	A	510
5421	*	0340	A	680
5421	*	0425	A	850
5421	*	0510	A	1020
5421	*	0595	A	1190
5421	*	0680	A	1360
5421	*	0765	A	1530
5421	*	0850	A	1700
5421	*	0255	B	510
5421	*	0340	B	680
5421	*	0425	B	850
5421	*	0510	B	1020
5421	*	0595	B	1190
5421	*	0680	B	1360
5421	*	0765	B	1530
5421	*	0850	B	1700
5421	*	0255	C	510
5421	*	0340	C	680
5421	*	0425	C	850
5421	*	0510	C	1020
5421	*	0595	C	1190
5421	*	0680	C	1360
5421	*	0765	C	1530
5421	*	0850	C	1700
5421	*	0255	D	510
5421	*	0340	D	680
5421	*	0425	D	850
5421	*	0510	D	1020
5421	*	0595	D	1190
5421	*	0680	D	1360
5421	*	0765	D	1530
5421	*	0850	D	1700