

# 590

Pitch 19,05 mm  
H= 8,7 mm



590 FT  
590 FT *One track Belt*  
590 FTT




## 590 FT

Tappeto Modulare 590 FT, H=8,7 M=3"  
 Modular Belt Series 590 FT, H=8,7 M=3" / Modulare Mattenkette 590 FT, H=8,7 M=3"

CODE STRUCTURE GUIDE			
(Example)			
5301	01	0009	C
Series	*Material	Width	Version

Backflex radius min.: 25 mm

**19.05mm**  
PITCH

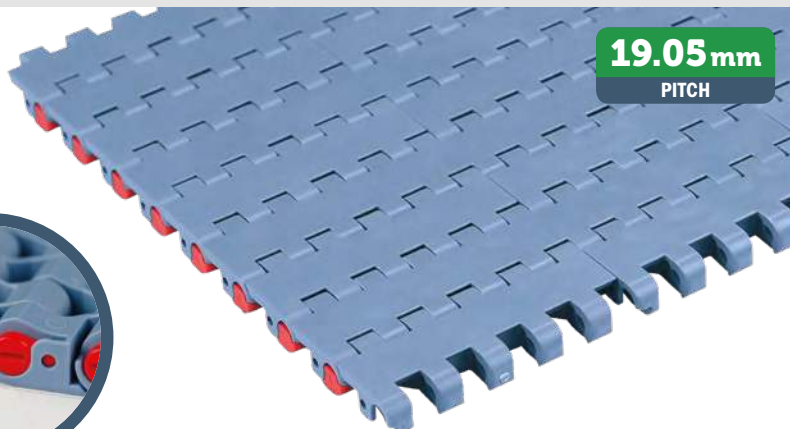

Imperial Size

### \*Material

#### LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 30000 N/m  
 Weight: 7,2 kg/m<sup>2</sup>  
 Temp. range dry: -40÷80 °C  
 Temp. range wet: -40÷65 °C  
 Pin material: PBT white

#### MX - Code 03

Performance PBT


Max w. load: 24000 N/m  
 Weight: 7,0 kg/m<sup>2</sup>  
 Temp. range dry: -40÷120 °C  
 Temp. range wet: -40÷60 °C  
 Pin material: POM grey

#### MPX - Code 25


Lubricated Acetal

Max w. load: 30000 N/m  
 Weight: 7,2 kg/m<sup>2</sup>  
 Temp. range dry: -40÷80 °C  
 Temp. range wet: -40÷65 °C  
 Pin material: PBT white

### Version A - Standard

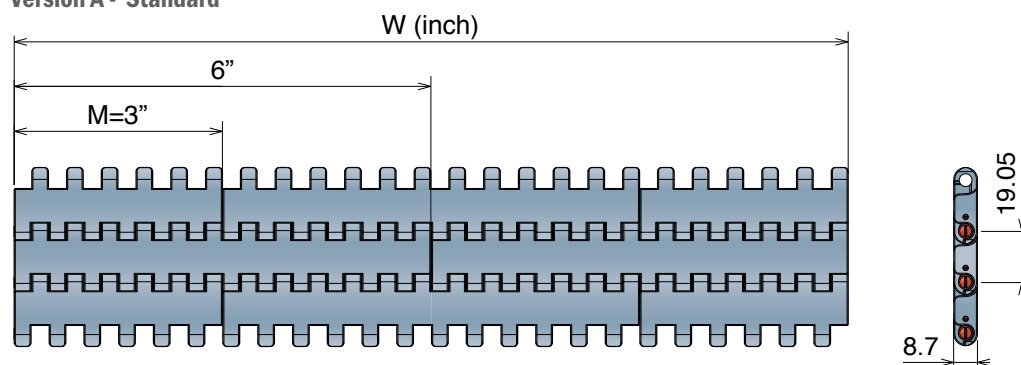

### Version C - With 2 Positioner

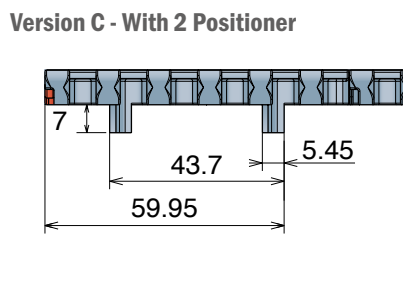

### Version A - Standard

Series	Material	Width	Version
5301	*	0003	A
5301	*	0006	A
5301	*	0009	A
5301	*	0012	A
5301	*	0015	A
5301	*	0018	A
5301	*	0021	A
5301	*	0024	A
5301	*	0027	A
5301	*	0030	A
5301	*	0033	A
5301	*	0036	A
5301	*	0039	A
5301	*	0042	A
5301	*	0045	A
5301	*	0048	A
5301	*	0051	A
5301	*	0054	A

### Version C - With 2 Positioners

Series	Material	Width	Version
5301	*	0003	C
5301	*	0006	C
5301	*	0009	C
5301	*	0012	C
5301	*	0015	C
5301	*	0018	C
5301	*	0021	C
5301	*	0024	C
5301	*	0027	C
5301	*	0030	C
5301	*	0033	C
5301	*	0036	C
5301	*	0039	C
5301	*	0042	C
5301	*	0045	C
5301	*	0048	C
5301	*	0051	C
5301	*	0054	C